



## 关于卧龙

---

1984

30

////

## 产品介绍

---

卧龙集团


1Ph 230VAC 50/60Hz  
0.15kW-0.3kW  
0.6  
-25 60 -40  
-30-40  
0-10V RS485  
B3 B30 B14  
IP20 IP44 IP55 IP66  
C3-H C4-H  
UL CE CCC

3Ph 380-480VAC 50/60Hz  
1.1 2.2kW  
0.9  
-25 -55 -40  
-30-40  
0-10V RS485  
B3 B30 B14  
IP55 IP66  
C3-H C4-H  
UL CE

	[V]	[Hz]	[kW]	[r/min]	[A]	[%]
EM4210A15***	1-220-240	50/60	0.15	720/960/1000/1050/1200	200-1200	80%
EM4210A13***	1-220-240	50/60	0.25	720/960/1000/1050/1200	200-1200	81%
EM4210A12***	1-220-240	50/60	0.37	960/1000/1050/1200	200-1200	82%
EM4210B15***	1-220-240	50/60	0.15	1350/1500/1800/2200	200-2200	81%
EM4210B13***	1-220-240	50/60	0.25	1350/1500/1800/2200	200-2200	82%
EM4210B12***	1-220-240	50/60	0.3	1350/1500/1800/2200	200-2200	83%

	A	B	C	D	E	H	K	L	AB	AC	BB	EB	HD
42	112	90	45	12.7/15/17/20	/	71	8.5	244	135	102.5	110	/	135

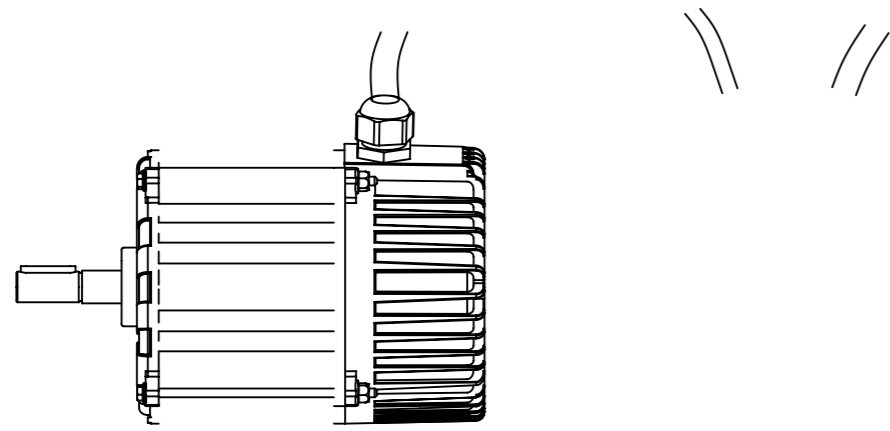

	[V]	[Hz]	[kW]	[r/min]	[A]	[%]
EM5610A32***	3-380-480V	50/60	1.1	720/960/1000/1050/1200	200-1200	86%
EM5610A21***	3-380-480V	50/60	1.5	720/960/1000/1050/1200	200-1200	87%
EM5610A31***	3-380-480V	50/60	2.2	960/1000/1050/1200	200-1200	88%
EM5610B32***	3-380-480V	50/60	1.1	1350/1500/1800/2200	200-2200	88%
EM5610B21***	3-380-480V	50/60	1.5	1350/1500/1800/2200	200-2200	89%
EM5610B31***	3-380-480V	50/60	2.2	1350/1500/1800/2200	200-2200	90%

	A	B	C	D	E	H	K	L	AB	AC	BB	EB	HD
56	140	100	/	20/24	/	90/100	11	/	180	138.5	130	/	141

1Ph 115, 230, 460VAC 3Ph 380-480VAC 50/60Hz

1/4-1HP, max 1kW

0.7

-20 ~-55                      -40                      -30-40

0-10V RS485 PWM

B3 B30


IP20 IP44 IP55 IP66

C3-H C4-H

UL CE CCC


	[V]	[Hz]	[HP]	[r/min]		[A]	[%]
EM4810B14***	1-115/230	50/60	1/4	720/960/1000/1050/1200	200-1200	3.1/1.8	81%
EM4810B12***	1-115/230	50/60	1/3	720/960/1000/1050/1200	200-1200	3.6/2.4	82%
EM4810B12***	1-115/230	50/60	1/2	720/960/1000/1050/1200	200-1200	5.9/3.3	82%
EM4810A34***	1-115/230	50/60	3/4	720/960/1000/1050/1200	200-1200	8/4.68	83%
EM4810A11***	1-115/230	50/60	1	960/1000/1050/1200	200-1200	9.5/5.8	84%
EM4810D14***	1-115/230	50/60	1/4	1350/1500/1800	200-1800	3.7/1.7	82%
EM4810D12***	1-115/230	50/60	1/3	1350/1500/1800	200-1800	4/2.2	83%
EM4810D12***	1-115/230	50/60	1/2	1350/1500/1800	200-1800	5.9/3.2	83%
EM4810C34***	1-115/230	50/60	3/4	1350/1500/1800	200-1800	8.4/4.5	85%
EM4810C11***	1-115/230	50/60	1	1350/1500/1800	200-1800	10.7/5.9	86%
EM4810E14***	1-460-480	50/60	1/4	1000/1050/1200/1500/1800	120-1800	0.85	83%
EM4810E12***	1-460-480	50/60	1/3	1000/1050/1200/1500/1800	120-1800	1.6	86%
EM4810E12***	1-460-480	50/60	1/2	1000/1050/1200/1500/1800	120-1800	1.6	86%
EM4810E34***	1-460-480	50/60	3/4	1000/1050/1200/1500/1800	120-1800	2.25	87%
EM4810E11***	1-460-480	50/60	1	1000/1050/1200/1500/1800	120-1800	3	88%

	[V]	[Hz]	[HP]	[r/min]		[A]	[%]
EM4810F14***	3-380-480	50/60	1/4	1000/1050/1200/1500/1800	120-1800	0.52-0.45	84%
EM4810F12***	3-380-480	50/60	1/3	1000/1050/1200/1500/1800	120-1800	0.95-0.84	87%
EM4810F12***	3-380-480	50/60	1/2	1000/1050/1200/1500/1800	120-1800	0.95-0.84	87%
EM4810F34***	3-380-480	50/60	3/4	1000/1050/1200/1500/1800	120-1800	1.33-1.16	88%
EM4810F11***	3-380-480	50/60	1	1000/1050/1200/1500/1800	120-1800	1.77-1.52	89%
	D	E	F	L	AC	DA	
48	12.7/15/17/20	/	/	/	143	/	

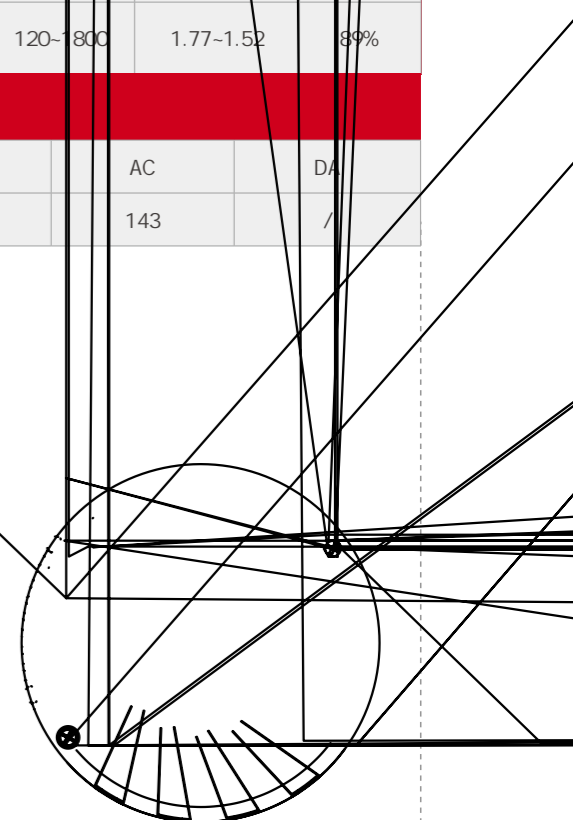

3Ph 380-480VAC 50/60Hz	
1.5	3kW
0.9	
-25	-55
-30-40	-40
0-10V RS485	
B30	
IP55 IP66	
C3-H C4-H	
UL CE	

	[V]	[Hz]	[kW]	[r/min]		[A]	[%]
EM13210A31***	3-380-480V	50/60	1.5	720/960/1000/1200	200-1200	3.0-2.4	89%
EM13210A31***	3-380-480V	50/60	1.8	720/960/1000/1200	200-1200	3.5-2.9	89%
EM13210A31***	3-380-480V	50/60	2.2	720/960/1000/1200	200-1200	4.3-3.5	90%
EM13210A72***	3-380-480V	50/60	2.6	960/1000/1200	200-1200	5.0-4.0	90%
EM13210A41***	3-380-480V	50/60	3.0	960/1000/1200	200-1200	5.8-4.5	90%
EM13210B31***	3-380-480V	50/60	1.5	1300/1450/1500/1800	200-1800	3.0-2.4	90%
EM13210B31***	3-380-480V	50/60	1.8	1300/1450/1500/1800	200-1800	3.5-2.9	90%
EM13210B31***	3-380-480V	50/60	2.2	1300/1450/1500/1800	200-1800	4.3-3.5	91%
EM13210B72***	3-380-480V	50/60	2.6	1300/1450/1500/1800	200-1800	5.0-4.0	91%
EM13210B41***	3-380-480V	50/60	3.0	1300/1450/1500/1800	200-1800	5.8-4.5	91%



—

ת.ת.ת.ת.ת.